STANDS
QUICK GUIDE

Step-by-step guide
to choosing a stand

1 Using the payload references across the top of the chart, select the appropriate section(s) based on the weight of your accessory

2 Use the height references on the left and right hand edges of the chart to identify the stand(s) with your required maximum, minimum or folded height

3 Your ideal stand(s) is identified. Move lower to review its key features and functions

Visit manfrotto.com to find out more

Manfrotto
Imagine More

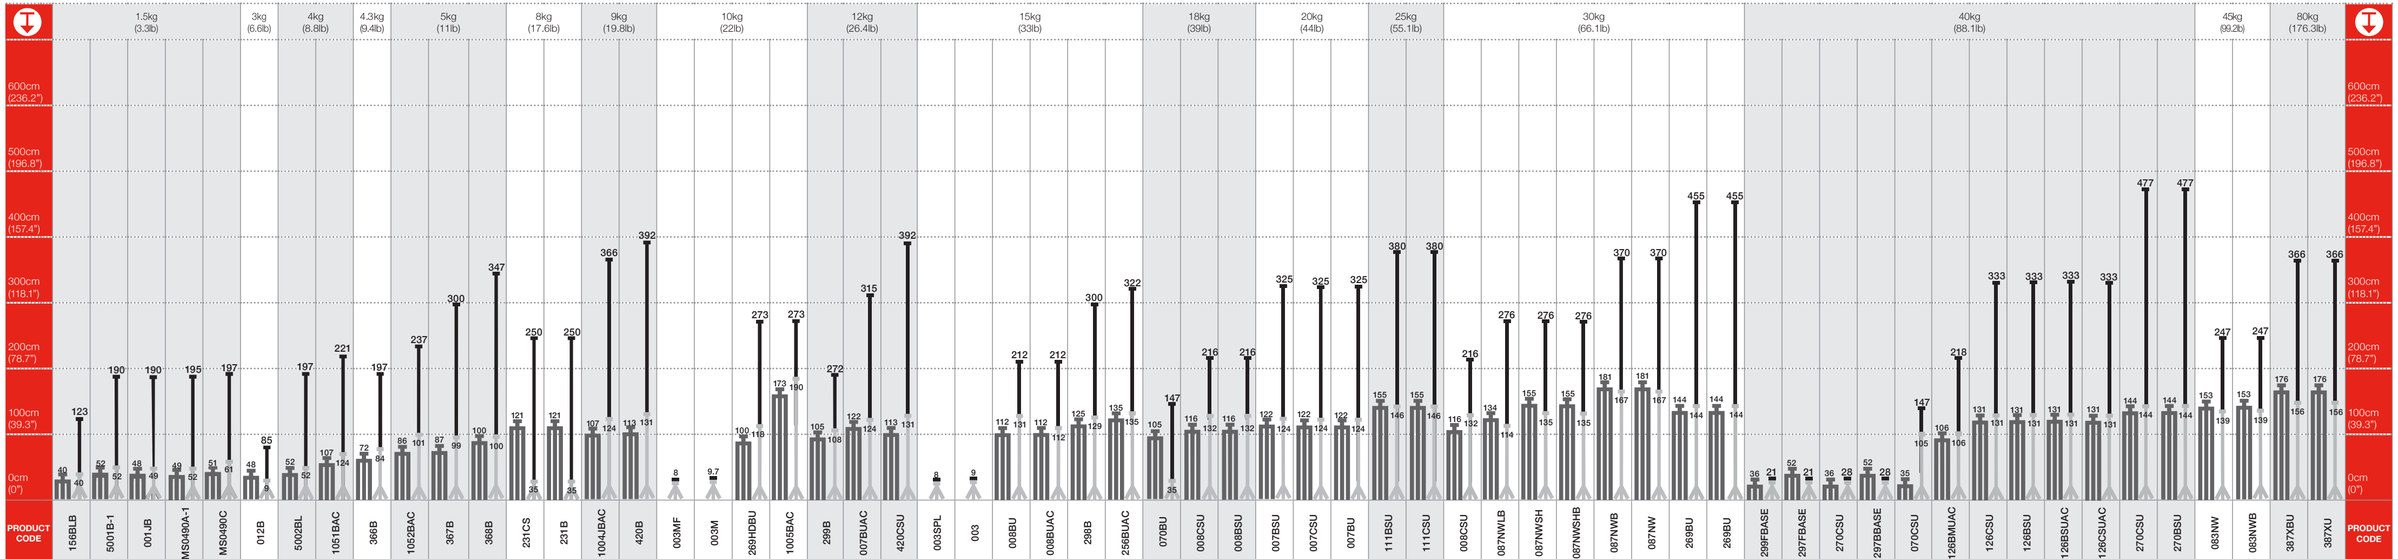

PRODUCT CODE	156BLB	5001B-1	001JB	MS0490A-1	MS0490C	012B	5002BL	1051BAC	366B	1052BAC	367B	368B	231CS	231B	100AJBAC	420B	003MF	003M	289HDBU	1005BAC	299B	007BUAC	420CSU	003SPL	003	008BU	008BUAC	298B	256BUAC	070BU	008CSU	008BSU	007BSU	007CSU	007BU	111BSU	111CSU	008CSU	087NWLB	087NWSH	087NWSHB	087NWB	087NW	269BU	269BU	299FBASE	297FBASE	270CSU	297FBBASE	070CSU	126BMUAC	126CSU	126BSU	126BSUAC	126CSUAC	270CSU	270BSU	083NW	083NWB	387XBU	387XU	PRODUCT CODE
cm	45	100	100	100	100	60	105	70	90	109	108	110	100	100	106	109	40	40	174	106	75	118	109	60	60	118	118	100	128	109	118	118	118	118	128	102	102	118	100	128	128	128	128	174	128	75	100	174	100	109	126	126	126	126	126	174	174	128	128	180	180	cm
in	17.7	39.4	39.4	39.4	39.4	23.6	41.3	27.6	35.4	42.9	42.5	43.3	39.4	39.4	41.7	42.9	15.7	15.7	68.5	41.7	29.5	46.5	42.9	23.6	23.6	46.5	46.5	39.4	50.4	42.9	46.5	46.5	46.5	46.5	46.5	40.2	40.2	46.5	39.4	50.4	50.4	50.4	50.4	68.5	50.4	29.5	39.4	68.5	39.4	42.9	49.6	49.6	49.6	49.6	49.6	68.5	68.5	50.4	50.4	70.9	70.9	in
kg	0.6	0.9	0.9	1.1	0.78	1.3	1.4	1	1	1.2	1.4	1.8	8	6.4	3	2.7	0.5	0.52	10	2	4.8	3	5.6	1	1	4.2	4.2	6	3.7	6.3	6.4	6.4	7.3	7.3	7.3	9	9	6.4	16	15.5	15.5	21.4	21.4	8	15.5	3.5	4.4	13.5	5.7	6.3	2.5	8.3	8.3	8.3	8.3	13.5	13.5	16	16	32.5	32.5	kg
lb	1.4	2	2	2.4	1.7	2.9	3	2.2	2.2	2.6	3	4	14.1	14.1	6.6	5.9	1.1	1.1	22	4.4	10.6	6.6	12.3	2.2	9.2	9.2	9.2	13.2	8.1	13.9	14.08	14.08	16.1	16.1	16.1	19.8	19.8	14.08	35.2	34.1	34.1	47.1	47.1	17.6	34.1	7.7	9.7	29.7	12.5	13.9	5.5	18.3	18.3	18.3	18.3	29.7	29.7	35.2	35.2	71.5	71.5	lb
mm	16	16	-	16	16	16	16	16	16	16	16	16	16	16	16	16	-	16	16	16	16	16	16	-	16	16	-	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16	35	16	16	16	16	16	16	16	16	-	-	mm
in	5/8	5/8	-	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	-	5/8	5/8	5/8	5/8	5/8	5/8	-	5/8	5/8	-	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	1 3/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	-	-	in
in	3/8 & 1/4	3/8 & 1/4	-	3/8 & 1/4	3/8 & 1/4	3/8 & 1/4	3/8 & 1/4	3/8 & 1/4	-	3/8 & 1/4	-	-	3/8 & 1/4	3/8 & 1/4	3/8 & 1/4	3/8 & 1/4	-	-	3/8	3/8 & 1/4	3/8 & 1/4	3/8	3/8 & 1/4	-	3/8 & 1/4	3/8	-	3/8	-	3/8 & 1/4	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	-	-	3/8	3/8	3/8	3/8	3/8	3/8	3/8	-	-	in
mm	-	-	17.5	-	28	-	-	17.5	-	17.5	-	-	16	16	17.5	16	16	-	28	16	16	28	16	16	16	28	-	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	-	28	28	28	28	28	28	28	28	28	28	mm
in	-	-	-	-	1 1/8	-	-	-	-	-	-	-	5/8	5/8	-	5/8	5/8	-	1 1/8	5/8	5/8	1 1/8	5/8	5/8	5/8	1 1/8	-	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	-	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	in
kg	-	-	-	-	-	-	-	-	-	-	-	-	5	2	-	-	-	-	1	-	-	2.5	-	-	-	3	-	-	-	-	-	-	6.7	6.7	6.7	6	6	18	5.5	15	15	30	30	6.3	6.3	-	-	12	-	18	10	3	3	3	3	12	12	30	30	80	80	kg
lb	-	-	-	-	-	-	-	-	-	-	-	-	11	4.4	-	-	-	-	2.2	-	-	5.5	-	-	-	6.6	-	-	-	-	-	-	14.7	14.7	14.7	13.2	13.2	39.6	12.1	33	33	66	66	13.9	13.9	-	-	26.4	-	39.6	22	6.6	6.6	6.6	6.6	26.4	26.4	66	66	176	176	lb
	-	-	-	-	-	-	017	017	017	018, 109, 110	018, 109, 110	018, 109, 110	Wheels incl.	Wheels incl.	018, 109, 110	018	-	-	103, 104, 104G	018, 109, 110	Wheels incl.	109, 110, 110G	018	-	-	110, 110G	110, 110G	Wheels incl.	109, 110, 110G	103, 104, 104G	110, 110G	Chrome Steel	110, 110G	109, 110, 110G	109, 110, 110G	109, 110, 110G	109, 110, 110G	109, 110, 110G	110, 110G	Wheels incl.	104, 104G, 374-10	104, 104G, 374-10	104, 104G, 374-10	104, 104G, 374-10	103, 104, 104G	103, 104, 104G	-	-	103, 104, 104G	-	103, 104, 104G	109, 110, 110G	109, 110, 110G	109, 110, 110G	109, 110, 110G	109, 110, 110G	103, 104, 104G	103, 104, 104G	104, 104G, 374-10	104, 104G, 374-10	374	374	
	Black Aluminium	Black Aluminium	Black Aluminium	Black Aluminium	Black Alu / Carbon Fibre	Black Steel / Black Aluminium	Black Aluminium	Black Aluminium	Black Aluminium	Black Aluminium	Black Aluminium	Black Aluminium	Black Steel / Chrome Steel	Black Steel / Black Aluminium	Black Aluminium	Black Aluminium	Black Steel	Black Steel	Black Aluminium	Black Aluminium	Black Steel / Black Aluminium	Black Aluminium	Chrome Steel / Silver	Black Steel	Black Steel	Chrome Steel	Black Aluminium	Black Steel / Black Aluminium	Black Alu / Chrome Black Steel	Black Aluminium	Chrome Steel	Chrome Black Steel	Chrome Steel	Chrome Black Steel	Chrome Steel	Chrome Black Steel	Chrome Steel	Chrome Black Steel	Black Steel / Chrome Steel	Chrome Steel	Chrome Black Steel	Chrome Black Steel	Chrome Steel	Chrome Black Steel	Black Aluminium	Black Aluminium	Black Powder Coated Steel	Black Powder Coated Steel	Chrome Steel	Black Powder Coated Steel	Chrome Steel	Black Aluminium	Chrome Steel	Chrome Black Steel	Chrome Black Steel	Chrome Steel	Chrome Steel	Chrome Black Steel	Chrome Steel	Chrome Black Steel	Chrome Black Steel	Chrome Steel	

KEY

MAXIMUM PAYLOAD · MAXIMUM FOOTPRINT · WEIGHT · MALE SPIGOT/PIN · MALE THREAD · FEMALE SOCKET/ RECEIVER · MAXIMUM LOAD ON FULLY EXTENDED STAND AT 5° INCLINATION · SUGGESTED WHEELS · MATERIAL/ FINISH

Manfrotto
A Vitec Group Brand